Home Pro

with USB charging and Surge Protection

Features

- Compact design
- Faster USB Charing Rate of 1A
- Surge protection and filtration
- Failsafe protection

This unit provides Protection for 4 AC Powered Devices. The unit will provide charging for up to 12 USB devices while also ensuring they are protected from surges. Line filtration has also been provided.

Specifications	
Power Surge Protection	
Nom. Input Voltage	230VAC 50Hz
Max. Continuous Current	16A
Max. Discharge Current	8kA L-N, L-E, N-E (8/20us)
Residual Voltage	<900V
Response Time	<25ns
Input Connectors	16A 3Pin Plug & Schuko

USB Ports		
Number of Poi	rts	12
Max. Current p	per Port	1A
Connectors		USB A Socket


Filtration	
Filtration Performance	See graph below
Filtration dB / 100kHz	50dB
Filtration dB / 1MHz	60dB
Earth Leakage Current	<0.6mA



*Specifications subject to change without prior notice due to continuous improvements

Other	
Indication	LED Lamp
Temperature Range	-20°C to +70°C
Standard Compliance	IEC 164-1, 61643-1, BC1.1
Power Lead Length	1.5m
Dimensions	360x100x60mm
Weight	1.5kg

Dimensions

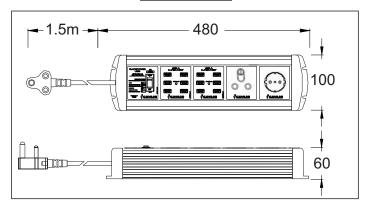

Designed and Manufactured by:

Clearline Protection Systems (Pty) Ltd

385 Roan Crescent Corporate Park North, Old Pta Road,

Midrand, South Africa

P.O. Box 5985, Halfway House, 1685

Tel: +27 (0) 11 848-1100 Fax: +27 (0) 11 314-3880 E-mail: info@clearline.co.za www.clearline.co.za

Filter Response

